

DESCRIPTION

The MS3007 is a terminal block type distributor that powers a two-wire transmitter, converts its 4 to 20mA signals into commonly used DC signals, and provides an isolated single output. This model can also be used as an isolator.

ORDERING CODE

Model _____ **MS3007** -

Power Supply
24V DC

Input
4 to 20mA DC from 2-wire transmitters

Output _____

A: 4 to 20mA DC	1: 0 to 10mV DC
D: 0 to 20mA DC	2: 0 to 100mV DC
Z: Other DC current signals	3: 0 to 1V DC
	4: 0 to 10V DC
	5: 0 to 5V DC
	6: 1 to 5V DC
	0: Other DC voltage signals


Options _____

No code: None
/K: Fast response (0 to 90% response time: 10ms max.)
/H: Polyurethane conformal coating
/X: Others (Special order)
 * For non-standard options, ask MTT for availability.

ORDERING INFORMATION

To place an order, please use the ordering code format as shown above.
(e.g.) MS3007-A

Other Ordering Examples:
 For an output code of "0": MS3007-0 (Output: 2 to 5V)
 For an option code of "X": MS3007-A/X (Response frequency: 50Hz)
 Note: If you wish to include multiple options in your order, specify the option codes in series (e.g. /KX).

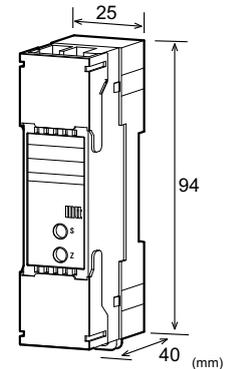

SPECIFICATIONS

POWER SECTION

Power Requirement	24V DC: 24V DC±10%
Power Sensitivity	Better than ±0.1%
Power Line Fuse	250mA fuse is installed (standard).
Power Consumption	
Current Output	75mA max.
Voltage Output	45mA max.
Note: The above figures are in the condition of the rated voltage supplied.	

INPUT SECTION

Input Signal	4 to 20mA DC from 2-wire transmitters
Input Resistance	250Ω
Transmitter Power Supply	Output voltage: 25V, typical. (0% input) 18V, typical. (100% input) Maximum current: 25mA, typical.
Limit Current for Short-Circuit Protection	26mA (typ.) * The unit has a built-in short-circuit detection circuit.
Permissible Short-Circuit Duration	Continuous.

OUTPUT SECTION

Allowable Output Load	
Voltage Output (DC)	1V span and up 2mA max. 10mV 10kΩ min. 100mV 100kΩ min.
Current Output (DC)	550Ω max.
Zero Adjustment	Approx. ±2.5% of span. (Adjustable by the front-accessible trimmer.)
Span Adjustment	Approx. ±2.5% of span. (Adjustable by the front-accessible trimmer.)

Ranges Available

	Current Signal	Voltage Signal
Output Range (DC)	0 to 20mA	0 to 10V
Output Span (DC)	4 to 20mA	10mV to 10V
Output Bias	0 to 100%	0 to 100%

* For current output signals, the accuracy of any current output smaller than 0.1mA is not guaranteed.
 Output Spec Ex. 1: For 4 to 20mA output, the output span is 16mA and the bias +25%.
 Output Spec Ex. 2: For 4 to 8V output, the output span is 4V and the bias +100%.

PERFORMANCE

Accuracy Rating	Better than $\pm 0.1\%$ of span (at $25^{\circ}\text{C} \pm 5^{\circ}\text{C}$).
Temperature Effect	Better than $\pm 0.2\%$ of span per 10°C change in ambient.
Response Time	85ms max. (0 to 90%) with a step input at 100%.
CMRR	100dB min. (500V AC, 50/60Hz)
Isolation	3-way isolation between input, output, and power.
Insulation Resistance	100M Ω min. (@ 500V DC) between input, output, and power.
Dielectric Strength	Input / Output / Power: 1500V AC for 1 minute (Cutoff current: 0.5mA)
Surge Withstand Capability	Tested as per ANSI/IEEE C37.90.1-1989.
Operating Environment	Ambient temperature: -5 to 55°C Humidity: 5 to 90% RH (non-condensing)
Storage Temperature	-10 to 60°C

PHYSICAL

Installation	DIN rail mounting
Wiring	M3.5 screw terminal connection (with drop-proof screws)
Screwing Torque	0.8 to 1.0 [Nm] * Recommended
External Dimensions	W25.0 x H94.0 x D40.0 mm
Weight	80g max.


MATERIAL

Housing	ABS resin (UL 94V-0)
Screw Terminal	Nickel-plated steel
Printed Circuit Board	Glass fabric epoxy resin (FR-4; UL 94V-0)

STANDARDS CONFORMITY


EC Directive	EMC Directive (2014/30/EU)
Conformity	EN61326-1:2013

TERMINAL ASSIGNMENTS




①	MON +
②	MON -
③	INPUT +
④	INPUT -
⑤	OUTPUT +
⑥	OUTPUT -
⑦	+ POWER
⑧	- POWER

BLOCK DIAGRAM

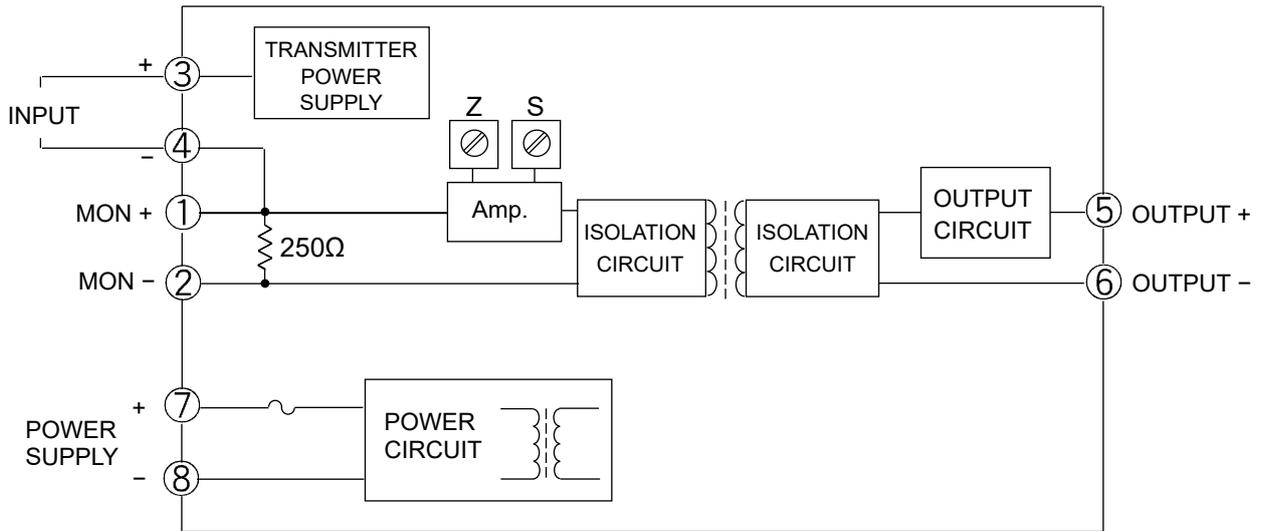

When used as a distributor:

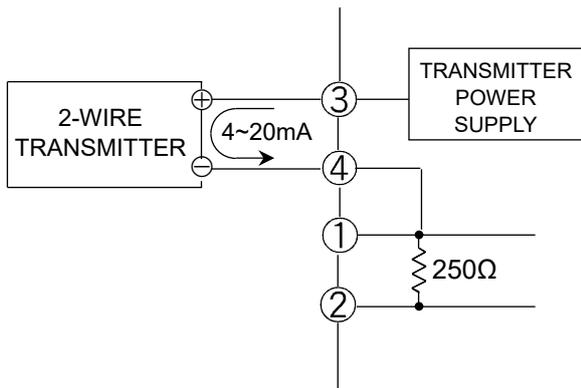

When used as an isolator:

