

PyroUSB


USB Configurable Infrared Temperature Sensors with 4-20 mA Output



- Temperature ranges from -40°C to 2000°C
- 2-wire 4-20 mA output
- Fully configurable via USB using Modbus protocol
- Cable and software included
- Specialised models for measuring metals and high-temperature objects
- General-purpose models for most other applications
- Peak and valley hold mode allows easy measurement of objects on conveyors
- Stainless steel housing, sealed to IP65
- Quick and easy installation

CONNECTIONS

The sensor will operate with either the 4 to 20 mA cable connected, the USB cable connected, or both.

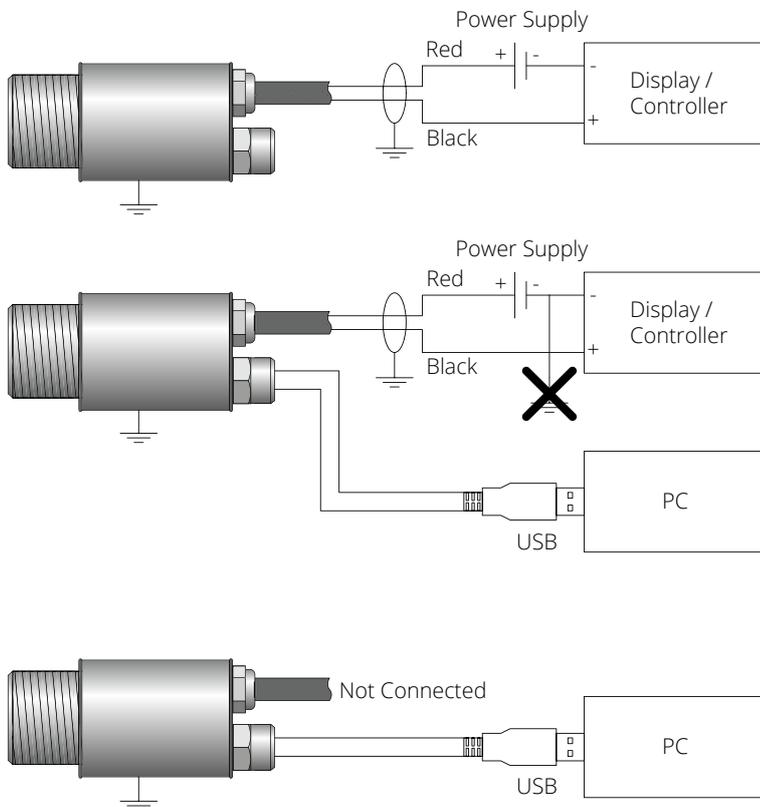

Note: The sensor must be grounded at only one point, either the cable shield or the sensor housing.

PyroUSB Series infrared pyrometers measure temperatures from -40°C to 2000°C accurately and consistently, with an outstanding response time of 200 ms. The 4 to 20 mA output is compatible with almost any indicator, controller, recorder or data logger, without the need for special interfacing or signal conditioning.

A choice of measurement wavelengths is available to suit a range of applications.

General-purpose PUA8 (8-14 μm) models can measure from -40°C to 1000°C. They are suitable for measuring high-emissivity materials such as paper, thick plastics, food, pharmaceuticals, rubber, asphalt and painted surfaces. These models are capable of measuring very low temperatures, so they are ideal for sub-zero measurements in the food, logistics and storage industries.

Short-wavelength PUA2 (2.2 μm) models have a choice of temperature ranges from 45°C to 2000°C. They provide a more accurate reading when measuring low-emissivity materials such as many reflective metals. They are also capable of measuring through glass viewports.

All models have USB communications. A USB cable is included and free software is available to download from the Calex website.

Data is transmitted via Modbus, so it is also easy to configure and read temperatures from the sensor using third-party software.

The USB cable has an IP65 connector at the sensor end, and an IP65 cap protects the sensor when the USB cable is not connected.

SOFTWARE


The sensor can be configured using the included USB cable and free Windows software, CalexConfig. It is also possible to take temperature readings, see temperature charts and log data via USB in real time.

CalexConfig is available to download free of charge at www.calex.co.uk/software.

CALEXCONFIG FEATURES

Simple, touch-friendly software for one sensor.

- Temperature display (°C or °F)
- Scrolling temperature chart
- Data logging to comma-separated text file, Excel-compatible
- PyroUSB sensor configuration:
 - Emissivity setting
 - Averaging
 - Peak/valley hold processing
 - Reflected energy compensation
 - 4-20 mA output temperature scale

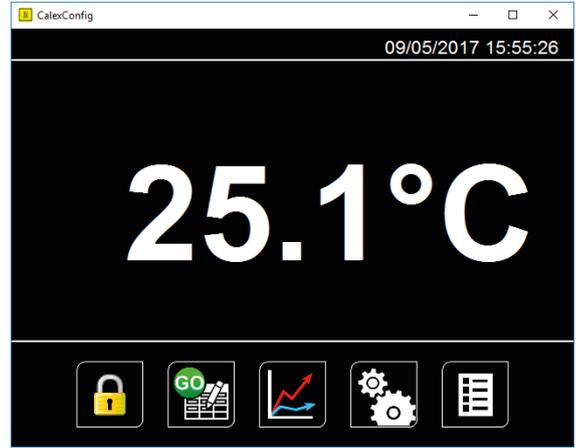

CalexConfig

THIRD-PARTY SOFTWARE


The PyroUSB can also be used with third-party Modbus software. Modbus protocol information is provided in the Operator's Guide, available to download at www.calex.co.uk and supplied with each sensor.

OPTICS


Diameter of target spot measured versus distance from sensing head (90% energy)

Note: The sensor will measure longer distances than shown, with a larger measured spot size.


Optics (PUA2)

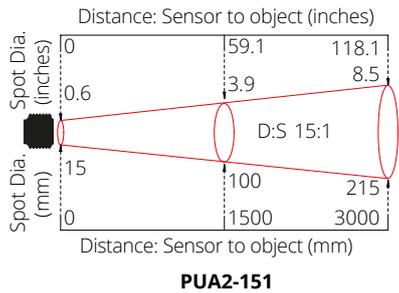


PUA2-151

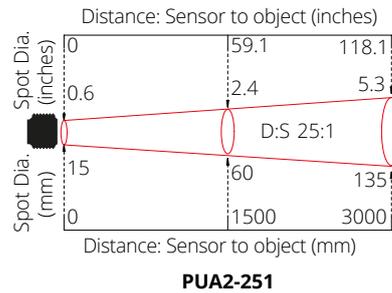

PUA2-251

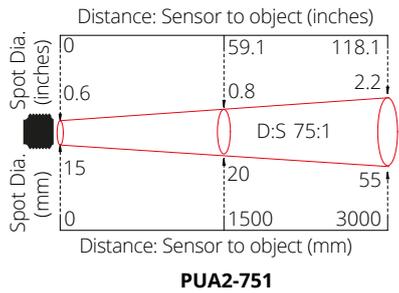


PUA2-751

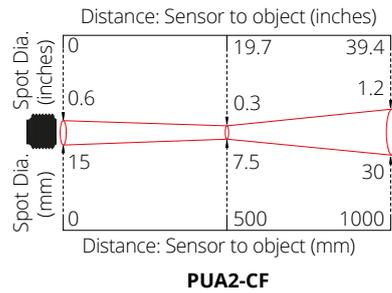


PUA2-CF

Optics (PUA8)

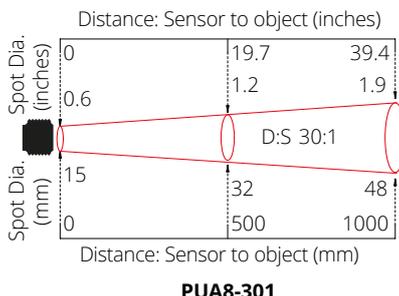

PUA8-301

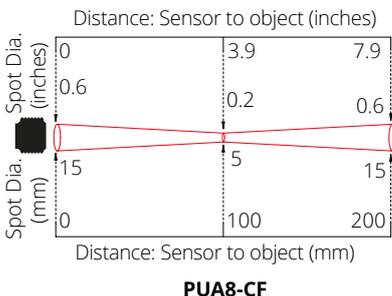

PUA8-CF

SPECIFICATIONS

General Specifications		
Model	PUA2	PUA8
Spectral Response	2.2 μm	8 to 14 μm
Application	Ferrous metals and high-temperature targets	General purpose
Temperature range	Choice of ranges from 45°C to 2000°C	-40°C to 1000°C
Response time	200 ms	
Output	2-wire, 4-20 mA, linear with measured temperature	
Communications	USB 2.0 (removable USB cable and software included) using the Modbus protocol	
Optics	Choice of optics for small or large targets at short or long distances (see Optics)	
Accuracy	$\pm 2^\circ\text{C}$ or 1% of reading, whichever is greater	$\pm 1^\circ\text{C}$ or 1% of reading, whichever is greater
Repeatability	$\pm 0.5^\circ\text{C}$ or 0.5% of reading, whichever is greater	
Emissivity Setting	0.1 to 1.0	
Maximum Span (4-20 mA output)	Full temperature range	
Minimum Span (4-20 mA output)	100°C	


Electrical	
Supply Voltage	24 V DC (28 V DC max)
Sensor Voltage (minimum)	6 V DC
Maximum Loop Impedance	900 Ω @ 24 V DC

Mechanical	
Construction	Stainless Steel
Dimensions	\varnothing 27.6 x length 61 mm including cable glands
Thread mounting	M20 x 1 mm pitch, length 15 mm
4-20 mA Output Cable Length	1 m (standard), up to 30 m (optional)
Weight with 1 m Output Cable	155 g
USB Cable Length	1.8 m
Relative Humidity	95% max. non-condensing

Environmental	
Environmental Rating	IP65
Ambient (Operating) Temperature	0°C to 70°C (cooled models are available for higher temperatures)


MINIMUM MEASURABLE TEMPERATURE

(PUA2-151-LT only)

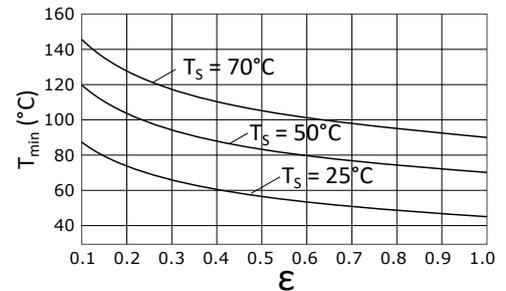

Graph showing the minimum measurable object temperature (T_{min}), determined by surface emissivity (ϵ) and sensor temperature (T_s).

DIMENSIONS

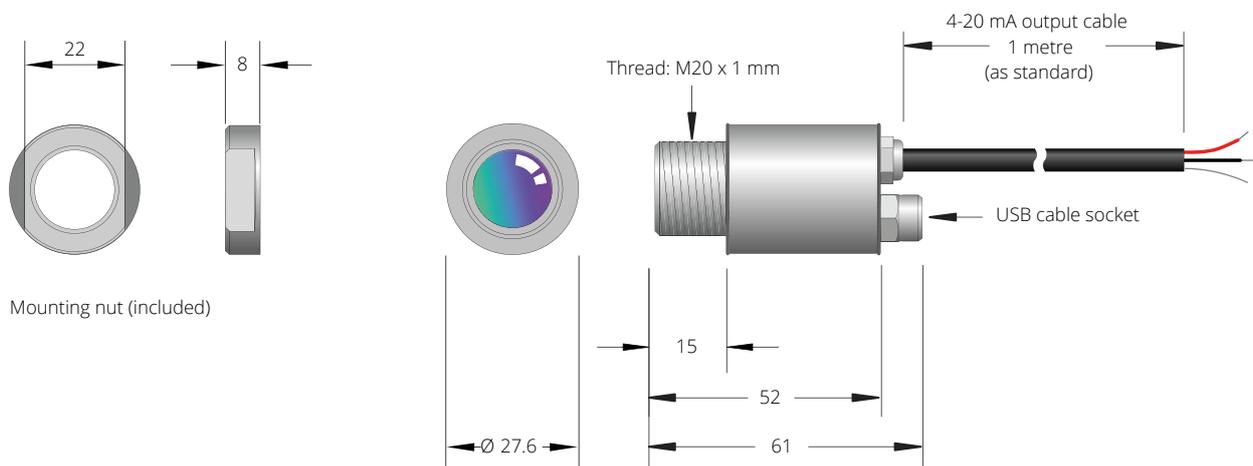


All dimensions in mm

MODEL NUMBERS



PyroUSB infrared temperature sensor with 4-20 mA output, fully configurable via USB.

Scope of supply:
Sensor with built-in 4-20 mA output cable, removable USB cable, mounting nut and operator's guide

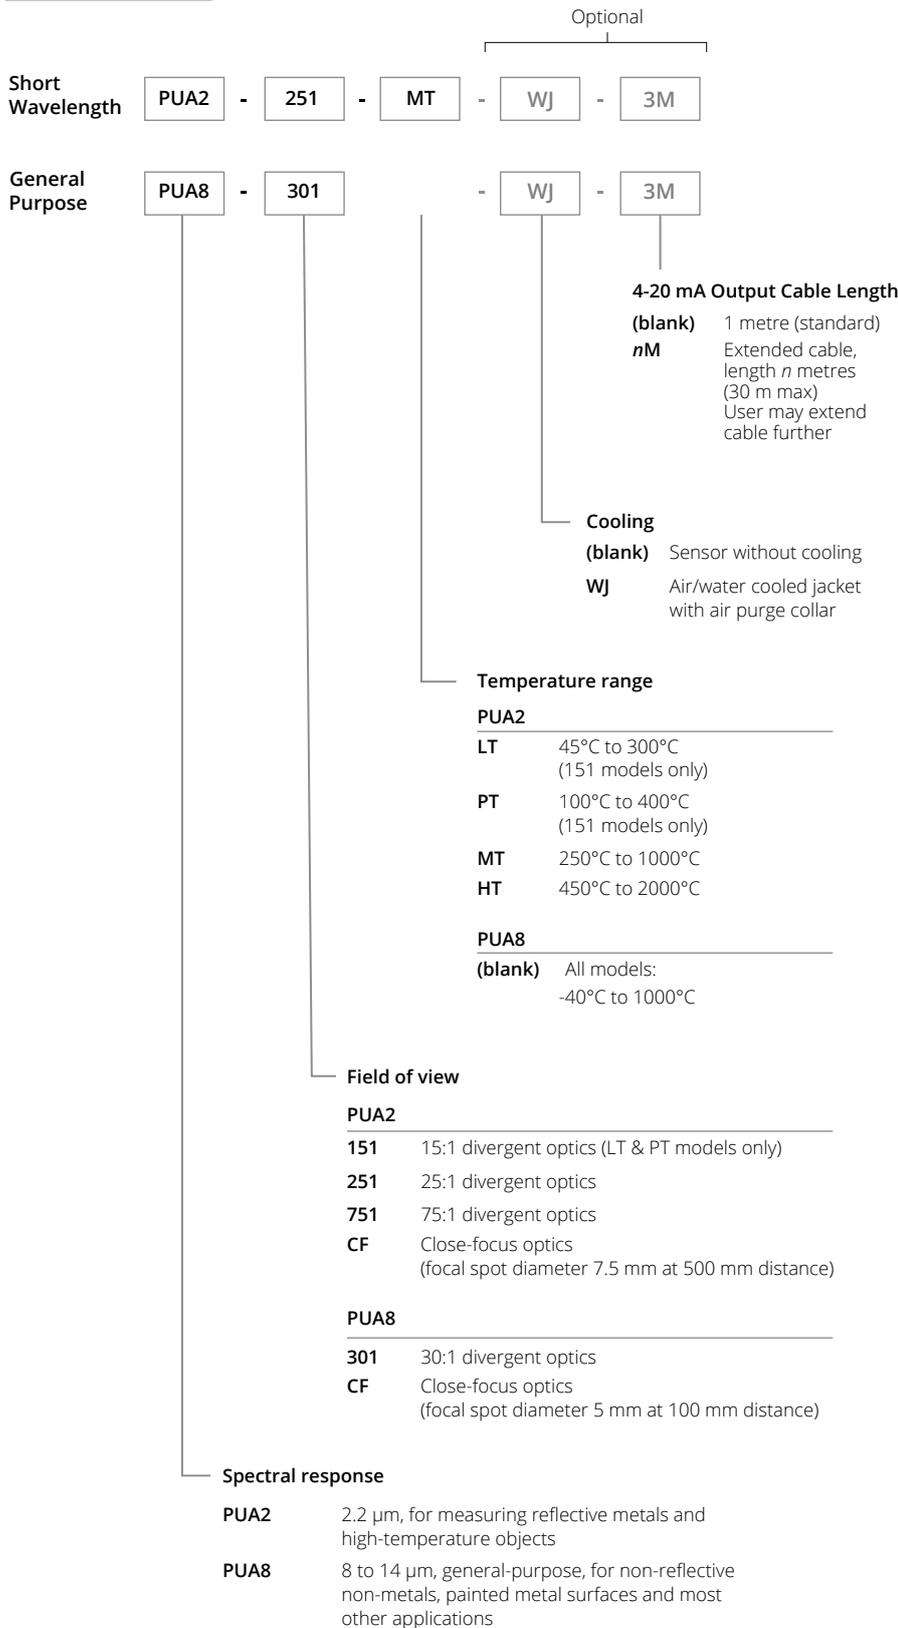

OPTIONS AND ACCESSORIES



ACCESSORIES ALSO AVAILABLE

Fixed mounting bracket **FBL**
Calibration certificate, UKAS traceable, 3 standard temperature points **CALCERTA**